


APC330 16-bit A/D Analog Input

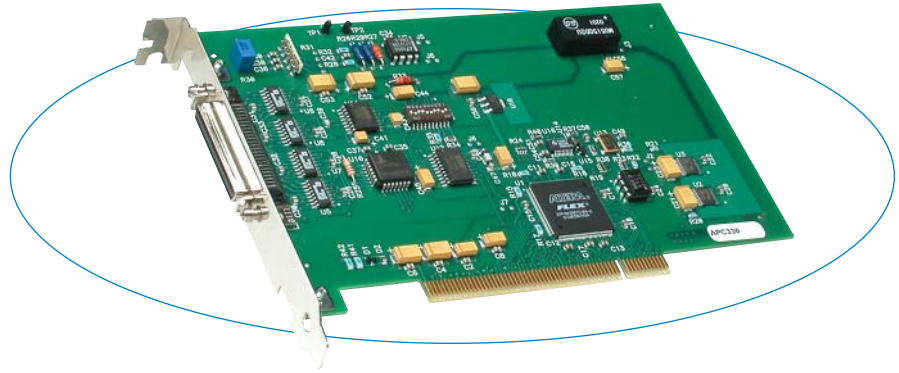

APC330 boards provide fast, high resolution A/D conversion.

The APC330 has many features to improve your overall system throughput rate. You can scan all channels or define a subset for more frequent sampling. Burst mode scans selected channels at the maximum conversion rate. Uniform mode performs conversions at user-defined intervals. Both modes can scan continuously, or execute a single cycle upon receiving a trigger.

“Mail box” memory allows the CPU to read the latest data in 32 storage buffer registers without interrupting the A/D converter.

Features

- 16-bit A/D converter (ADC)
- 8 μ S conversion time (125KHz)
- 16 differential or 32 single-ended inputs ($\pm 5V$, $\pm 10V$, 0-5V, and 0-10V input ranges)
- Individual channel mailbox with one or two storage buffer registers per channel
- Programmable scan control
- Four scanning modes
- User-programmable interval timer
- External trigger input and output
- Programmable gain for individual channels
- Post-conversion interrupts

Benefits

- “Mailbox” memory eliminates scanning interruptions for optimum throughput.
- Data register indicates new and missed (overwritten) data values in the mail box.
- Programmable interrupts simplify data acquisition by providing greater control.

Advanced memory management techniques allow the APC330 to operate with minimal interruption of the A/D converter.

Specifications

Analog Input

Input configuration: 16 differential or 32 single-ended channels.

A/D resolution: 16 bits.

Input ranges: $\pm 5V$, $\pm 10V$, 0-5V, and 0-10V.

Programmable gains: 1x, 2x, 4x, 8x.

Maximum throughput rate:

Only one channel can be updated at a time.

One channel: 125KHz (8 μ S/conversion)

[66KHz (15 μ S/conversion) recommended]

16 channels (differential): 4.2KHz (240 μ S/16 ch)

32 channels (single-ended): 2.1KHz (480 μ S/32 ch).

Data sample memory: Individual channel mailbox with one or two storage buffer registers per channel

A/D triggers: Internal timer, external source, and software.

Internal timer: One user programmable timer for data acquisition.

System accuracy: ± 3 LSB (0.005%) typical (SW calib., gain=1, 25°C).

Data format: Straight binary or two’s compliment.

Input overvoltage protection: V_{ss} -20V to V_{dd} 40V with power on, -35V to 55V power off.

Common mode rejection ratio (60Hz): 96dB typical.

Channel-to-channel rejection ratio (60Hz): 96dB typical.

Environmental

Operating temperature: 0 to 70°C (E version -40 to 85°C).

Storage temperature: -55 to 100°C.

Relative humidity: 5 to 95% non-condensing.

MTBF: Consult factory.

Power: 230mA at +5V (275mA maximum).

PCI Bus Compliance

This device meets or exceeds all written PCI local bus specifications per rev. 2.2 dated December 1998.

System base address: This board operates in memory space. It consumes 4K of memory space.

Data transfer bus: Slave with 32, 16, and 8-bit data transfer operation.

Interrupts (INTA#): Interrupt A is used to request an interrupt.

Ordering Information

I/O Boards

APC330

Analog input board

APC330E*

Same as APC330 plus extended temperature range

* Consult factory for long-term availability.

Software

PMCSW-API-VXW: VxWorks® software support package

PCISW-API-WIN32: 32-bit Windows® DLL Driver software package

PCISW-API-WIN64: 64-bit Windows® DLL Driver software package

PCISW-API-LNX: Linux™ support (website download only)

Accessories

5028-378

Termination panel, SCSI-2 connector, 50 screw terminals.

5028-438

Cable, shielded, SCSI-2 connector at both ends

[Visit our web page for more information](#)

All trademarks are the property of their respective owners.