
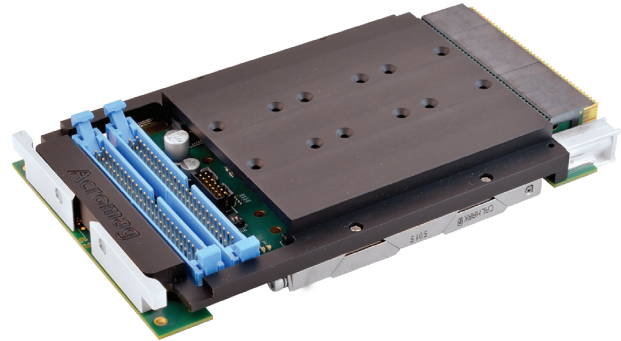


AcroPack® Carriers

VPX4500 Series VPX Carrier Cards for AcroPack® Modules

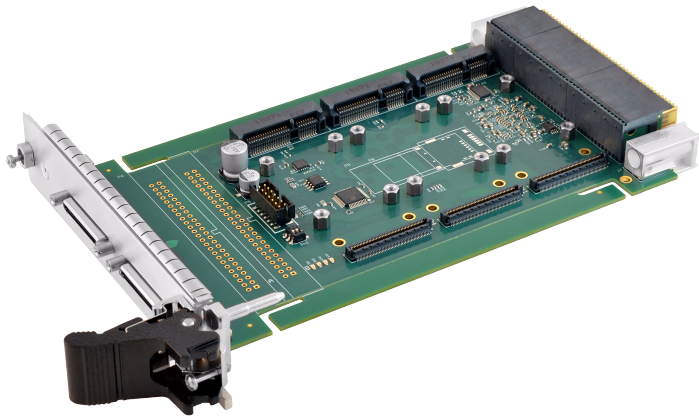

Air-cooled and conduction-cooled versions ♦ 3U Format ♦ Three AcroPack slots ♦ PCIe Gen 1 interface

Description

Models

VPX4500E-LF: Air-cooled

VPX4500-CC-LF: Conduction-cooled

The VPX4500 is a 3U VPX carrier for Acromag AcroPack (AP) mezzanine modules.

The carrier board provides a modular approach to system assembly since each carrier can be populated with any combination of analog input/output, digital input/output, communication, AcroPack or some third-party mPCIe compliant modules.

The modularity allows the user to create a board which is customized to the application. This saves money and space; a single carrier board populated with AP modules may replace several dedicated function VPX boards. The VPX4500 carrier board provides impressive functionality at low cost.

Model VPX4500E-LF is an air-cooled product that supports three AcroPack sites. Two of the sites provide field I/O connections through front panel mounted 50 pin shielded connectors. The third site provides field I/O connections through the VPX backplane.


Model VPX4500-CC-LF is a conduction-cooled product that supports three AcroPack sites. Two of the sites provide field I/O connections through 50 pin ribbon cable connectors. The third site provides field I/O connections to the VPX backplane.

Model VPX4500-RTM-LF is a rear transition module used with both the VPX4500E-LF and the VPX4500-CC-LF carriers to provide access to the slot C AcroPack field I/O signals.

The AcroPack® product line updates our popular Industry Pack I/O modules with a PCIe interface format. This tech-refresh design offers a compact size, low-cost I/O, the same functionality and memory map of the existing Industry Pack mezzanine modules.

Key Features & Benefits

- Three AcroPack or mini-PCIe module slots support any combination of I/O functions.
- PCI Express version 2.1 compliant.
- Fused +1.5V, +3.3V, +5V, +12V, and -12V DC power is provided. A fuse is present on each supply line serving each AcroPack module.
- Front panel SCSI-2 connectors for the field I/O signals using VPX4500E-LF.
- Extended temperature range.
- Standard 14-pin Xilinx JTAG programming header.
- Software development tools for VxWorks®, Linux®, and Windows® environments.

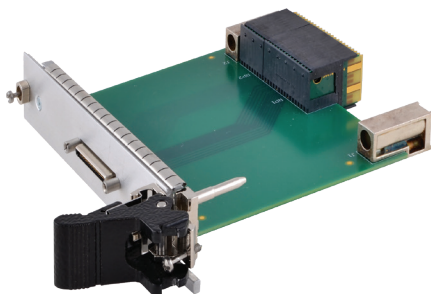

VPX4500-RTM-LF

Acromag 
THE LEADER IN INDUSTRIAL I/O

Tel: 844-878-2352 ■ solutions@acromag.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA

Performance Specifications

■ PCI Express Bus Compliance

This device meets or exceeds all written PCI Express specifications per revision 2.1.

Includes a PCIe Gen 2 switch to expand the single host PCIe port to three ports, one to each device. (AcroPack or mini-PCIe).

The host port consists of four PCIe lanes, each of the mini-PCIe sites have one lane each.

■ Ease of Use

A unique carrier and site number is set via slot address. This provides the capability to distinguish a particular AcroPack module from others when multiple instances of the same module are used in a system.

A standard 14-pin Xilinx JTAG programming header is provided for programming and debugging the FPGA on some AcroPack modules. The JTAG ports of the two AcroPack modules are daisy-chained.

■ General

Form Factor

3U VPX bus 6.299" (160mm) x 3.937" (100.0mm).

Pitch

VPX4500-LF (air-cooled): 1" pitch.

VPX4500-CC-LF (conduction-cooled): 1" pitch.

VPX Carrier Interface

Compatible VITA 65 module / slot profiles:
FRU EEPROM with temperature monitor.

AcroPack Interface

One AcroPack module in single VPX slot.

3.3V, 5V and ±12V provided for AcroPack modules via the VPX backplane.

■ Power Requirements

Power

+3.3 Volts (±10%): 0.55mA typical.

+12 Volts (±5%): 25mA Typical.

The VPX4500 has two DC/DC converters to provide the power supply voltages to the AcroPack modules that are not present at the host interface. The +1.5 Volt supply is sourced from the 5 Volt host power. The -12 Volt supply is sourced from +12 Volt host power.

■ Physical

Physical Configuration

PCIe x4 lane.

Field I/O Connector

VPX4500-CC-LF: Two 50-pin male headers.

VPX4500-LF: Two 50-pin Champ 0.8mm connectors.

■ Environmental

Operating temperature

-40 to +85°C.

Storage Temperature Range

-55 to 125°C.

Relative Humidity

5 to 95% non-condensing.

Vibration

0.05g RMS (20 - 2000Hz) random, operating 6g RMS per Hz spectrum.

Shock

30g each axis, 11ms.

Ordering Information

Carrier Cards

[VPX4500-LF](#): VPX carrier card, 3U, three AcroPack slots.

[VPX4500-CC-LF](#): Conduction-cooled version of VPX-4500.

See Acromag.com/AcroPacks for a full list of I/O modules.

Accessories

[VPX4500-RTM-LF](#): Rear transition module

[5028-378](#): Termination panel, SCSI-2 connector, 50 screw terminals

[5025-552](#): Termination panel, DIN-rail mountable panel

[5025-550-x](#): Non-shielded flat 50-pin female to 50-pin female cable. x = length in feet, 12 ft. max.

[5025-550-4](#): Non-shielded flat 50-pin female to 50-pin female cable. 4 feet long

[5025-550-7](#): Non-shielded flat 50-pin female to 50-pin female cable. 7 feet long

[5025-550-10](#): Non-shielded flat 50-pin female to 50-pin female cable. 10 feet long

[5028-372](#): Round cable, shielded, SCSI-2 to CHAMP. 0.8mm, 2 meters long.

[5028-619](#): Cable, 50-pin CHAMP to pigtail, 36 inches long

[5028-620](#): Cable, 50-pin CHAMP to pigtail, 70 inches long

Software (see software documentation for details)

[APSW-API-VXW](#): VxWorks software support package

[APSW-API-WIN](#): Windows DLL driver software support pkg

[APSW-API-LNX](#): Linux support (website download only)

