


Ethernet I/O: EtherStax® Series

ES2162 Ethernet Analog Input Modules

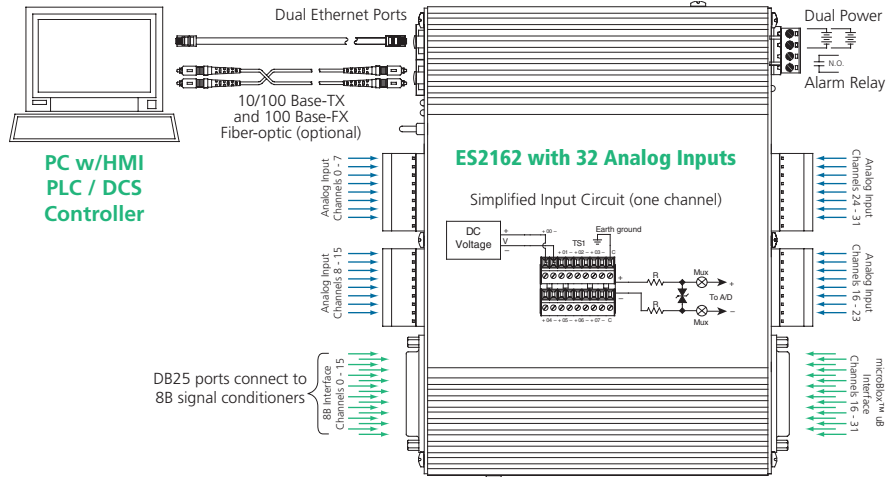

32-channel differential analog voltage input with 8B interface ♦ Modbus TCP/IP or UDP/IP communication

Description

These EtherStax I/O units provide a rugged, high-density, and high-speed solution to interface a large quantity of analog input signals. Units natively accept 32 differential high-level analog voltage inputs, which are ideal for most sensor interface applications in remote zones. For systems requiring high channel-to-channel isolation or a variety of input signals (voltage, current, temperature, frequency, load cell, etc.), the ES2162 has two ports that will each interface 16 inputs from a 8B signal conditioner backpanel. Available in an aluminum enclosure or as an open circuit board, both packages stack vertically to maintain a very small footprint. Many other features help increase reliability, improve performance and protect from harsh industrial environments.

Input Ranges

±5V, ±10V DC

8B Signal Conditioner Interface

Dual DB25 ports provide alternate interface to 8B signal conditioner backpanel systems

Ethernet Communication


10/100Base-T(X) and 100Base-FX, Automatic MDI/MDI-X on all copper ports, Modbus TCP/IP or UDP/IP protocol

Power Requirement

18 to 36V DC (redundancy-ready)

Approvals

UL/cUL:
Zone 2, Class 1, Division 2, Groups ABCD

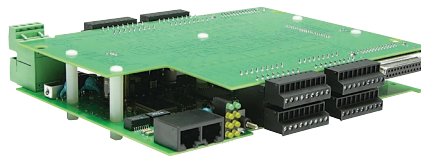

Open circuit board versions are also available.

Key Features & Benefits

- 32 differential high-level voltage analog inputs
- Dual DB25 ports for alternate interface to 8B signal conditioning backpanels
- 4-way isolation and surge suppression
- Configurable from any web browser
- High-resolution 16-bit A/D
- Fast scanning up to 1KHz
- Dual-format data registers support both 16-bit signed integers and 32-bit floating point formats
- User-configurable IEEE-754 32-bit floating point scaling registers on all channels
- User-configurable integration function on all channels with totalizing 32-bit non-volatile counter registers
- User-configurable sample averaging and integration/totalization function with non-volatile registers
- Built-in precision voltage source for automatic calibration
- On-demand self-test with built-in calibration sources



Tel: 248-295-0880 ■ sales@acromag.com ■ www.acromag.com ■ 30765 S Wixom Rd, Wixom, MI 48393 USA

Ethernet I/O: EtherStax® Series

ES2162 Ethernet Analog Input Modules



Performance Specifications

◆ Analog Field Inputs

Input Channel Configuration

32 differential analog inputs. 16 channels on front and rear panels of unit.

DC Voltage Input Ranges (per-channel basis)

±5V or ±10V DC (default).

User-configured on a per-channel basis.

Input Scaling (per-channel basis)

Floating Point Format: IEEE-754 32-bit configurable for 12 digits with 4 decimal places.

16-bit Signed Integer Format: All channels are represented as ±30,000

Input Resolution and Accuracy

Resolution: 16-bit maximum, 0.00167%

Accuracy: Better than 0.02% of range

Input Impedance

Greater than 1M ohms

Input Scan Groups and Scan Times

Eight user-enabled 4-channel scan groups.

5mS (200Hz) update of all 32 channels.

8mS (125Hz) update when totalizing.

First 4-channel group updates in 770µS (1.3KHz). Each additional 4-ch. group adds 590µS to update time.

Sample Averaging

0 to 500 samples, user-configurable.

Input Overvoltage Protection

Bipolar Transient Voltage Suppressers (TVS), 18V clamp level typical.

Noise Rejection

Common Mode (50-60Hz): Better than 72dB

◆ 8B External Inputs

Compatible 8B Modules and Backpanels

Dual DB25 (front and rear) ports provide cable connection to industry-standard 8B backpanels with analog input modules only. Each DB25 port alternately connects up to 16 input channels to any 8B backpanel via an SCMXXCA006 cable. NOTE: Differential input channels are disabled in 8-channel groups when DB25 port(s) are used.

Input Configuration (per-channel basis)

Web page configuration sets channels to sense inputs via screw terminals or DB25 port.

8B Input Module Outputs

All 8B input modules provide 0-5V, 1-5V or ±5V DC outputs.

8B Input Module Power

8Bs require 5V DC ±5%. For other power options, order one (1) supply per backpanel.

7-34V DC: Model 8BPWR-2 power supply.

AC power: Model PSSR-B05 or PWR-4505.

8B Input Isolation (CMV Input-to-Output)

1500Vrms channel-to-channel isolation.

◆ Local Alarm Output

Configuration

Failsafe or non-failsafe (software-configurable) relay trips on power or link-loss failure.

Type

SPST-NO, 1 Form A, Class I, Division II approved

Rating

5A @ 24V DC/250V AC, 6000 cycles resistive

3A @ 24V DC/250V AC, 100,000 cycles general

2A @ 24V DC/250V AC, Hazardous locations

Maximum Switching Voltage and Power

250V AC / 750VA, 125V DC / 90W

◆ Ethernet Interface

Internal Switch or Hub/Repeater

Dual-port Ethernet switch. Web-configurable as a true switch (default mode) or low-latency hub.

Network Connector [10/100 Base-T(X)Copper]

One or two 8-pin RJ-45 connectors. Automatic MDI/MDI-X. 100m communication distance.

Network Connector (100 Base-FX Fiber-optic)

One multi-mode duplex SC connector. 2km communication distance. Full/half-duplex, selectable.

Protocols and Addressing

Modbus TCP/IP or UDP/IP. StaticIP, DHCP, BootP.

Configurable IP addresses.

Ethernet Modbus TCP/IP Sockets/Sessions

1-10 socket/sessions programmable via web page.

Ethernet Redundancy

Compatible with STP, RSTP, proprietary schemes.

◆ Environmental

Operating and Storage Temperature

Operating Ranges:

-40 to 70°C (-40 to 158°F)

Storage Range: -40 to 85°C (-40 to 185°F)

Power Requirements

18-36V DC. Redundant, diode-coupled terminals.

4.4W (copper ports), 5.5W (fiber-optic ports).

Isolation

I/O, power, relay and Ethernet port-to-port.

Peak: 1500V AC, ANSI/ISA-82.01-1988

Continuous: 250V AC, 354V DC

◆ Enclosure and Physical

Housing Classification and Dimensions

IP20: 8.226" x 2.444" x 7.25", 4 lbs. packed

PCB: 7.920" x 1.875" x 7.25", 1.65 lbs. packed

Safety Approvals

UL/cUL Listed.

Hazardous Locations: Class I; Div 2; A, B, C, D

Open board units: UL Recognized

Shock and Vibration Immunity (in enclosure)

Mechanical Shock: 50g (3ms), 30g (11ms)

Random Vibration: 5g, (5-500Hz)

Ordering Information

◆ Models

[Go to on-line ordering page >](#)

ES2162-0000

ES2162-0010

Voltage inputs, two copper ports.

IP20 enclosure (-0000) or open board (-0010).

ES2162-1000

ES2162-1010

Voltage inputs, one copper and one fiber port.

IP20 enclosure (-1000) or open board (-1010).

◆ Accessories

Industrial Ethernet Switches

Hardware Accessories and Power Supplies

Software Support

Acromag 
THE LEADER IN INDUSTRIAL I/O

Tel: 248-295-0880 ■ sales@acromag.com ■ www.acromag.com ■ 30765 S Wixom Rd, Wixom, MI 48393 USA

All trademarks are the property of their respective owners. Copyright © Acromag, Inc. 2023. Data subject to change without notice. Printed in USA 4/2023