


# Ethernet I/O: EtherStax® Series

## ES2161 Ethernet Analog Input Modules

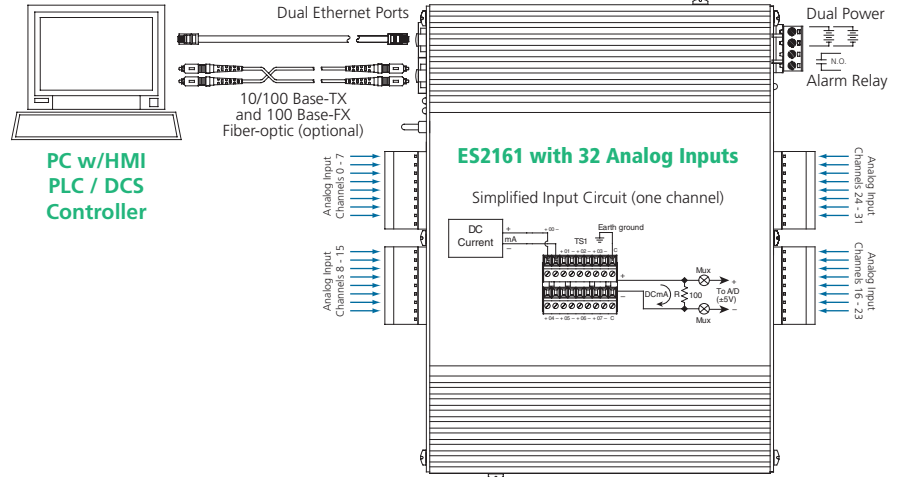

32-channel differential analog current input ♦ Modbus TCP/IP or UDP/IP communication

### Description

These EtherStax I/O units provide a rugged, high-density, and high-speed solution to interface a large quantity of analog input signals. Units accept 32 differential analog current inputs, which are ideal for many sensor interface applications in remote zones. Available in an aluminum enclosure or as an open circuit board, both packages stack vertically to maintain a very small footprint. Many other features help increase reliability, improve performance and protect from harsh environments.

### Input Ranges

±20mA, 0-20mA, 4-20mA DC

### Ethernet Communication

10/100Base-T(X) and 100Base-FX, Automatic MDI/MDI-X on all copper ports, Modbus TCP/IP or UDP/IP protocol

### Power Requirement

18 to 36V DC (redundancy-ready)

### Approvals

UL/cUL:  
Zone 2, Class 1, Division 2, Groups ABCD

### Key Features & Benefits

- 32 differential current analog inputs
- 4-way isolation and surge suppression
- Configurable from any web browser
- High-resolution 16-bit A/D
- Fast scanning up to 1KHz
- Dual-format data registers support both 16-bit signed integers and 32-bit floating point formats
- User-configurable IEEE-754 32-bit floating point scaling registers on all channels
- User-configurable integration function on all channels with totalizing 32-bit non-volatile counter registers
- User-configurable sample averaging and integration/totalization function with non-volatile registers
- Built-in precision voltage source for automatic calibration
- On-demand self-test with built-in calibration sources



Tel: 248-295-0880 ■ sales@acromag.com ■ www.acromag.com ■ 30765 S Wixom Rd, Wixom, MI 48393 USA

# Ethernet I/O: EtherStax® Series

## ES2161 Ethernet Analog Input Modules



### Performance Specifications

#### ◆ Analog Field Inputs

##### Input Channel Configuration

32 differential analog inputs. 16 channels on front and rear panels of unit.

##### DC Current Input Ranges (per-channel basis)

±20mA, 0-20mA, or 4-20mA DC (default).

User-configured on a per-channel basis.

##### Input Scaling (per-channel basis)

Floating Point Format: IEEE-754 32-bit configurable for 12 digits with 4 decimal places.

16-bit Signed Integer Format: All channels are represented as ±30,000.

##### Input Resolution and Accuracy

Resolution: 15-bit maximum, 0.003%.

Accuracy: Better than 0.02% of range.

##### Input Impedance

100 ohms.

##### Input Scan Groups and Scan Times

Eight user-enabled 4-channel scan groups.

5mS (200Hz) update of all 32 channels.

8mS (125Hz) update when totalizing.

First 4-channel group updates in 770µS (1.3KHz). Each additional 4-channel group adds 590µS to update time.

##### Sample Averaging

0 to 500 samples, user-configurable.

##### Input Overvoltage Protection

Bipolar Transient Voltage Suppressors (TVS),

18V clamp level typical.

##### Noise Rejection

Common Mode (50-60Hz): Better than 72dB.

#### ◆ Local Alarm Output

##### Configuration

Failsafe or non-failsafe (software-configurable) relay trips on power or link-loss failure.

##### Type

SPST-NO, 1 Form A, Class I, Division II approved.

##### Rating

5A @ 24V DC/250V AC, 6000 cycles resistive.

3A @ 24V DC/250V AC, 100,000 cycles general.

2A @ 24V DC/250V AC, Hazardous locations.

##### Maximum Switching Voltage and Power

250V AC / 750VA, 125V DC / 90W.

#### ◆ Ethernet Interface

##### Internal Switch or Hub/Repeater

Dual-port Ethernet switch. Web-configurable as a true switch (default mode) or low-latency hub.

##### Network Connector [10/100 Base-T(X)Copper]

One or two 8-pin RJ-45 connectors. Automatic MDI/MDI-X. 100m communication distance.

##### Network Connector (100 Base-FX Fiber-optic)

One multi-mode duplex SC connector. 2km communication distance. Full/half-duplex, selectable.

##### Protocols and Addressing

Modbus TCP/IP or UDP/IP. StaticIP, DHCP, BootP.

Configurable IP addresses.

##### Ethernet Modbus TCP/IP Sockets/Sessions

1-10 socket/sessions programmable via web page.

##### Ethernet Redundancy

Compatible with STP, RSTP, proprietary schemes.

#### ◆ Environmental

##### Operating and Storage Temperature

Operating Ranges:

-40 to 70°C (-40 to 158°F)

Storage Range: -40 to 85°C (-40 to 185°F)

##### Power Requirements

18-36V DC. Redundant, diode-coupled terminals.

4.2W (copper ports), 5.25W (fiber-optic ports).

##### Ambient Temperature Effect

Less than 25ppm/°C (0.0025%/°C).

##### Isolation

I/O, power, relay and Ethernet port-to-port.

Peak: 1500V AC, ANSI/ISA-82.01-1988

Continuous: 250V AC, 354V DC

#### ◆ Enclosure and Physical

##### Housing Classification and Dimensions

IP20: 8.226" x 2.444" x 7.25", 4 lbs. packed

PCB: 7.920" x 1.875" x 7.25", 1.65 lbs. packed

##### Safety Approvals

UL/cUL Listed.

Hazardous Locations: Class I; Div 2; A, B, C, D

Open board units: UL Recognized.

##### Shock and Vibration Immunity (in enclosure)

Mechanical Shock: 50g (3ms), 30g (11ms)

Random Vibration: 5g, (5-500Hz)

### Ordering Information

#### ◆ Models

[Go to on-line ordering page >](#)

##### ES2161-0000

Current inputs, two Cu ports, IP20 enclosure

##### ES2161-0010

Current inputs, two Cu ports, open board

##### ES2161-1000

Current inputs, Cu & fiber ports, IP20 enclosure

##### ES2161-1010

Current inputs, Cu & fiber ports, open board

#### ◆ Accessories

Industrial Ethernet Switches

Hardware Accessories and Power Supplies

Software Support

**Acromag**   
THE LEADER IN INDUSTRIAL I/O

Tel: 248-295-0880 ■ sales@acromag.com ■ www.acromag.com ■ 30765 S Wixom Rd, Wixom, MI 48393 USA

All trademarks are the property of their respective owners. Copyright © Acromag, Inc. 2022. Data subject to change without notice. Printed in USA 7/2022