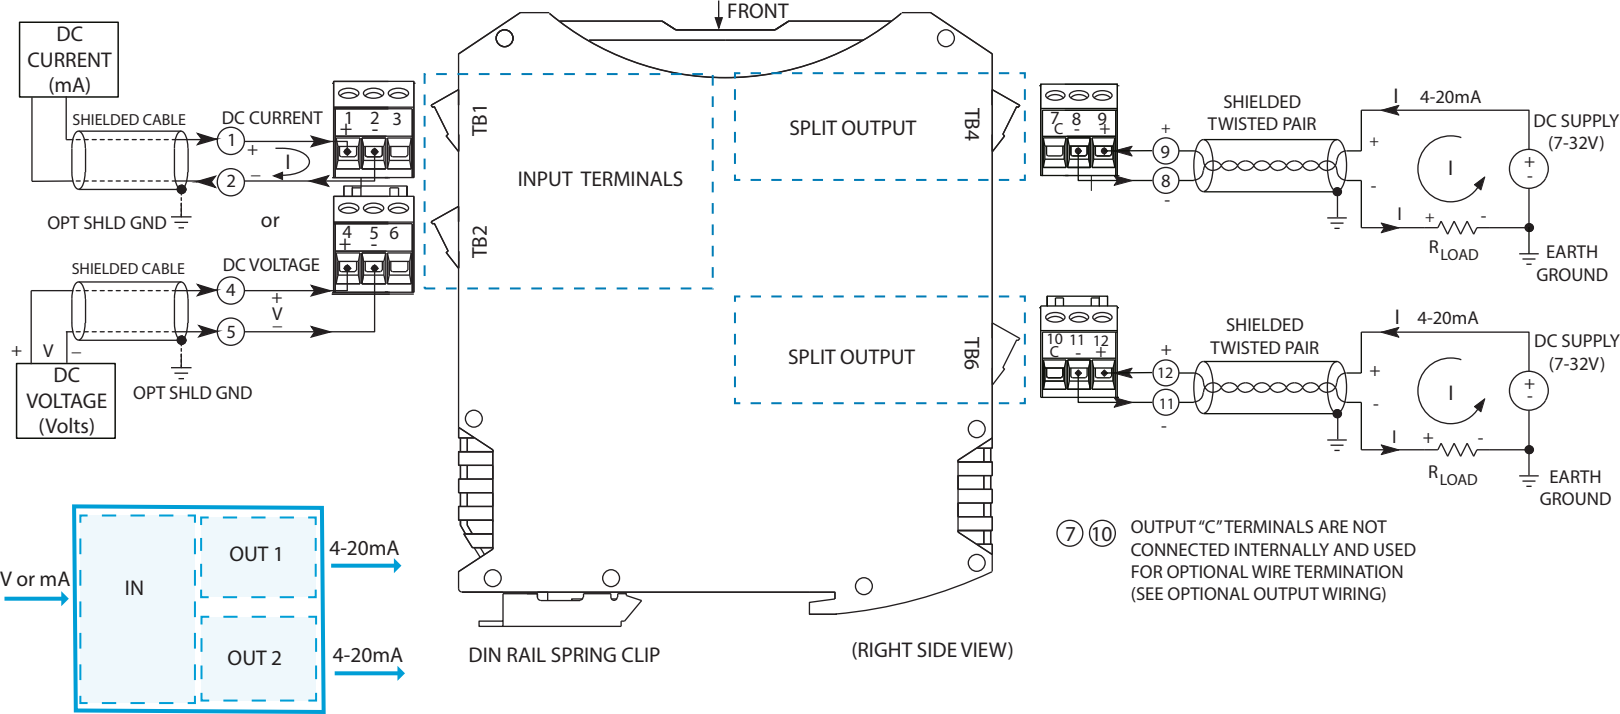
FRONT
DC CURRENT (mA)
SHIELDED CABLE
DC CURRENT
OPT SHLD GND
or
SHIELDED CABLE
DC VOLTAGE
DC VOLTAGE (Volts)
OPT SHLD GND
TB1
TB2
INPUT TERMINALS
SPLIT OUTPUT
TB4
SPLIT OUTPUT
TB6
SHIELDED TWISTED PAIR
4-20mA
DC SUPPLY (7-32V)
R LOAD
EARTH GROUND
SHIELDED TWISTED PAIR
4-20mA
DC SUPPLY (7-32V)
R LOAD
EARTH GROUND
V or mA
IN
OUT 1
OUT 2
4-20mA
4-20mA
DIN RAIL SPRING CLIP
(RIGHT SIDE VIEW)
7 10 OUTPUT "C" TERMINALS ARE NOT CONNECTED INTERNALLY AND USED FOR OPTIONAL WIRE TERMINATION (SEE OPTIONAL OUTPUT WIRING)