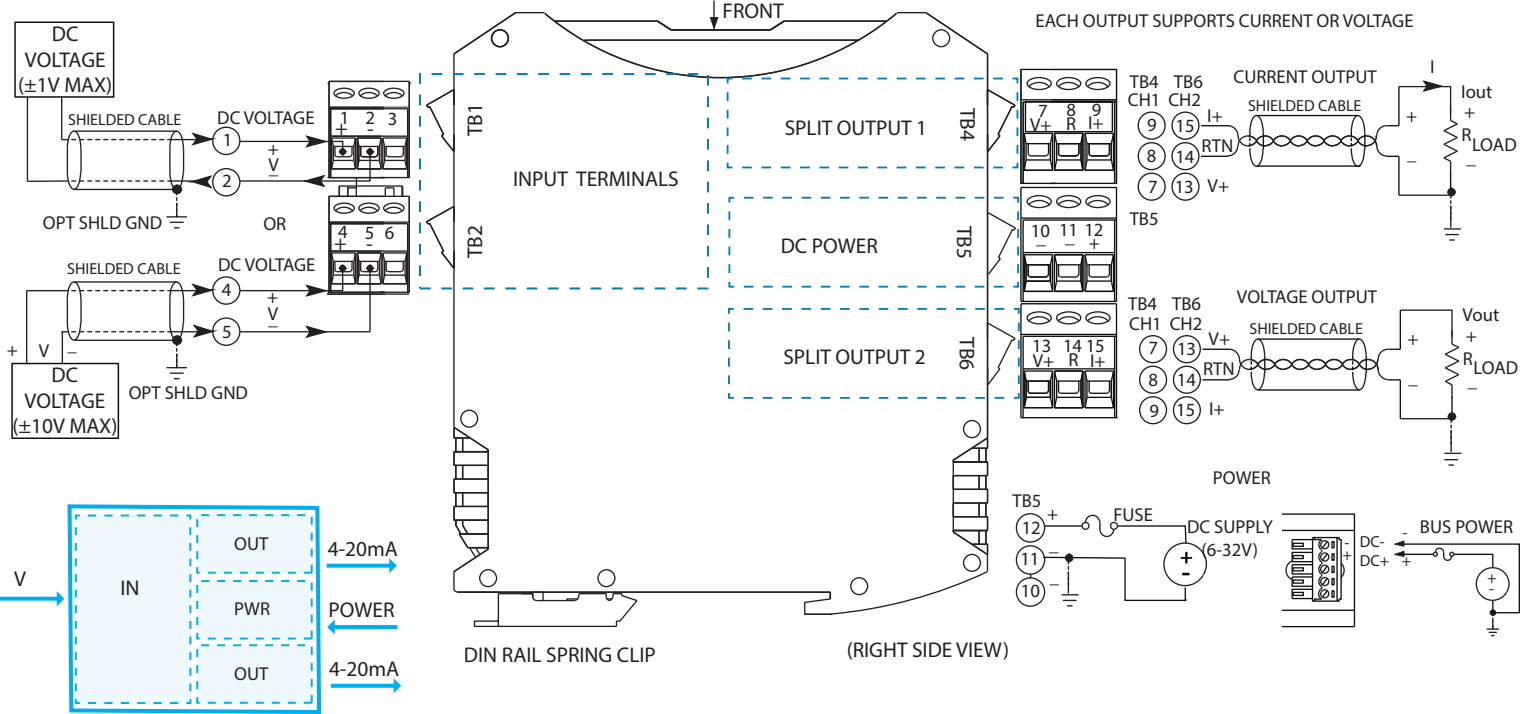

FRONT
EACH OUTPUT SUPPORTS CURRENT OR VOLTAGE
DC VOLTAGE (±1V MAX)
SHIELDED CABLE
DC VOLTAGE
OPT SHLD GND
OR
SHIELDED CABLE
DC VOLTAGE
OPT SHLD GND
DC VOLTAGE (±10V MAX)
TB1
TB2
INPUT TERMINALS
SPLIT OUTPUT 1
TB4
DC POWER
TB5
SPLIT OUTPUT 2
TB6
TB4 CH1
TB6 CH2
CURRENT OUTPUT
SHIELDED CABLE
I+
RTN
V+
Iout
RLOAD
TB5
TB4 CH1
TB6 CH2
VOLTAGE OUTPUT
SHIELDED CABLE
V+
RTN
I+
Vout
RLOAD
POWER
TB5
FUSE
DC SUPPLY (6-32V)
BUS POWER
DC-
DC+
V
IN
OUT
PWR
OUT
4-20mA
POWER
4-20mA
DIN RAIL SPRING CLIP
(RIGHT SIDE VIEW)