
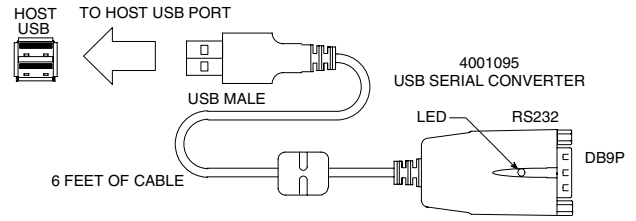


Model 4001-095 USB-to-Serial Adapter



Simplifies configuration of Acromag I/O Modules ♦ Enables configuration via USB port

Description

This device is a USB-to-serial adapter that you can use to communicate with many Acromag I/O products for setup and re-configuration for your application.

Key Features & Benefits

- Connects to I/O modules via USB (other adapters may be necessary)
- Complete RS232 control signals
- Conforms to USB Specification, Version 1.1
- USB-powered
- Cable length, 6 ft., UL approved

Performance Specifications

USB Specification
Version 1.1

Data rate
Up to 115.2Kbps

Environmental Standards
RoHS-compliant

Basic Power Consumption
150mA

PC Requirements
Windows® 7 and newer.

Ordering Information

NOTE: For more information visit www.acromag.com.


Adapters

- [4001-095](#)
USB to serial adapter. Includes driver CD and manual.
- [5030-913](#)
Serial port adapter. DB9S connector to RJ11 jack.
- [5034-202](#)
RS-485 to 3-wire cable converter and cable, DB-9M to 3 x 12AWG RS-485 cable, 8 ft.
- [5032-787](#)
RS-232 to 151T transmitter configuration device converter and cable, 6 ft.
- [5034-214](#)
Non-isolated RS-232 to RS-485 Serial Port Converter, DB-9F to DB-9F.


Cables

- [5030-902](#)
Cable. 6 feet long with RJ11 plug at each end.

IntelliPack 800x Series Adapter and Cable

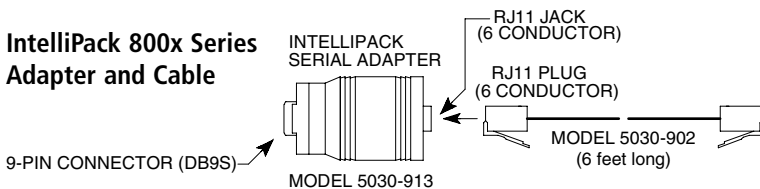

900MB Modbus Series Adapter and Cable

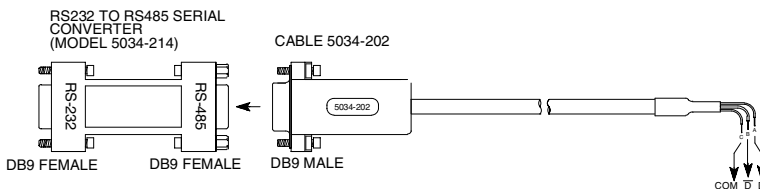

Tel: 248-295-0880 ■ sales@acromag.com ■ www.acromag.com ■ 30765 S Wixom Rd, Wixom, MI 48393 USA